



BACK VIEW

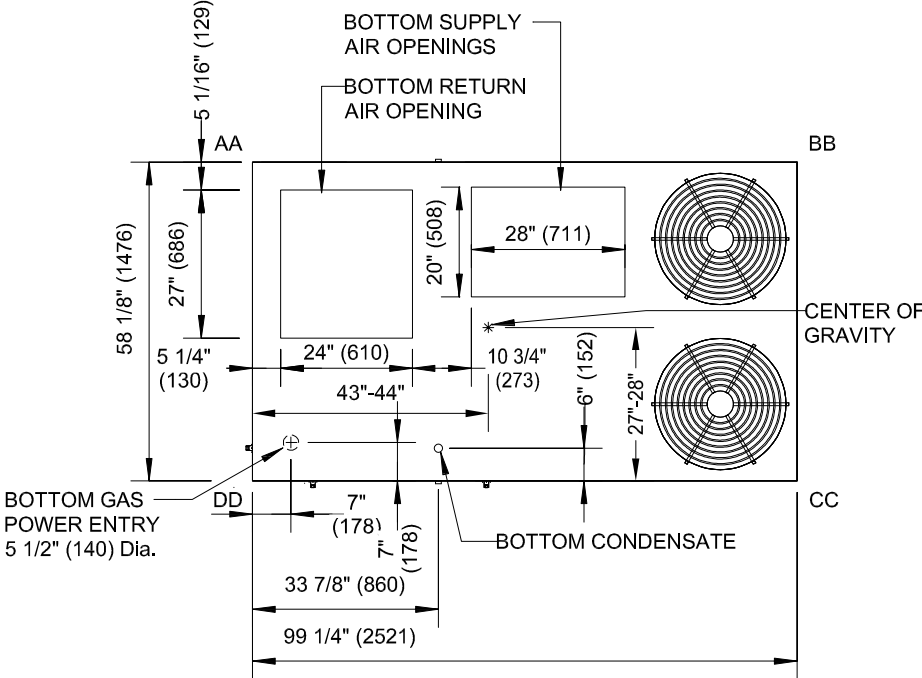


TOP VIEW (Base)

¹ Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	Unobstructed
Service Clearance	60	1524	36	914	36	934	60	1524	
Clearance to Combustibles	36	914	1	25	1	25	1	25	
Minimum Operation Clearance	36	914	36	914	36	914	36	914	


NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.
¹ Service Clearance - Required for removal of serviceable parts.
Clearance to Combustibles - Required clearance to combustible material.
Minimum Operation Clearance - Required clearance for proper unit operation.

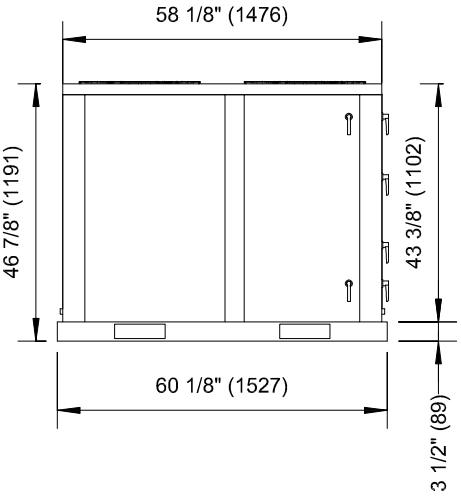

END VIEW

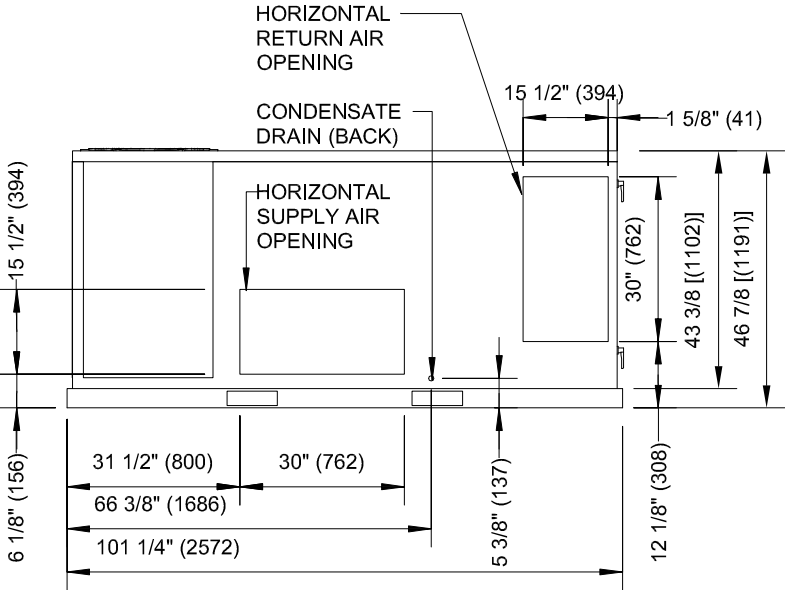

FRONT VIEW
(Horizontal Openings)

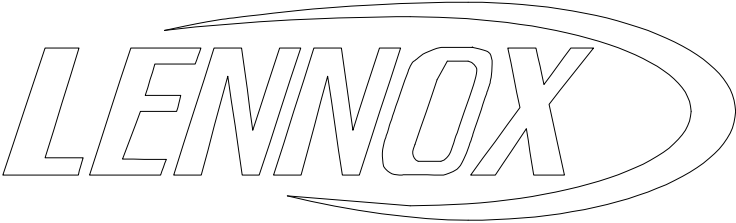

Enlight™ Packaged Dual Fuel High Efficiency Rooftop Units

Series: Enlight™

Model: LDT

Nominal Cooling Capacity (Tons): 6.5 - 10 Tons

LDT

Scale: N.T.S.

02-11-2025 9:06:50